SHANK ADAPTERS

CATALOGUE

qonar

GONAR Co. Ltd. has been operating on the international market since 1974. We have 39 years of expertise in manufacturing of mining, tunnelling & geotech tools. Using raw materials only from certified suppliers in combination with high-tech innovative production facilities, we can guarantee high quality of fully carburised drill steels. Our R&D Department equipped with a testing lab and our Sinter Plant producing carbides in controlled vacuum ovens, assure high manufacturing quality.

We offer a wide range of products with carbide sinters and have the possibility to quickly turn around on prototype tooling and urgent requirements. To sum up we are a dynamic company with an aim to become leaders in technology and product innovation.

CONTENTS

	PAGE
Shank adapters to several drill machines	2–3
Atlas Copco	4–7
Boart	7–8
Furukawa	8
Gardner Denver	8
Ingersoll Rand	8–9
Joy	10
Krupp	10
Montabert	10–12
Reedrill	12
Secoma	12
Tamrock (Sandvik)	12–16
Toyo	16

Shank adapter 1



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	32	380	10	2,1	**3514382**
T38	32	380	10	2,3	**35163821**

Drill rig producer	Drill type
Atlas Copco	BBC 41 / BBC 43 / BBC 44 / BBC 45 / BBC 100
Bőhler	HM 600 D
Gardner Denver	79 / 93 / 99
Ingersoll Rand	DA 35 / DA 505
Joy	TM 400
Le Roy	D 14 DR / D 25 DR
Montabert	LC 50 / TA 35
Tamrock	S 125

Shank adapter 2



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	32	380	10	2,0	**3514384**

Drill rig producer	Drill type
Ingersoll Rand	HBM 50
Tamrock	HL 432 / L 400 / L 500

Shank adapter 3



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R28	38	380	10	2,6	**3513380**
R32	38	380	10	2,7	**3514380**
R38	38	380	10	3,1	**3515382**
T38	38	380	10	2,3	**3516382**

Drill rig producer	Drill type
Atlas Copco	BBC 51 / BBC 52 / BBC 54 / BBC 120 / BBS 54 / BBS 120
Bőhler	HM 755 D
Montabert	H40 / H50 / H60 / H70

Shank adapter 4



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	38	330	12	2,4	**3614332**
R32	38	330	14	2,4	**3714332**
R38	38	330	12	2,6	**3615332**
R38	38	330	14	2,6	**3715332**
T38	38	330	14	2,6	**3716332**

Drill rig producer	Drill type
Demag	RD 400
Furukawa	795 D
Gardner Denver	DH 99 / DH 123
Ingersoll Rand	DA 45 / DA 475

Shank adapter 5

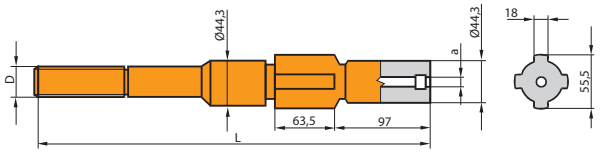

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	44,3	330	14	3,0	**3714331**
R32	44,3	380	14	3,6	**3714381**
R38	44,3	380	14	3,8	**3615381**
R38	44,3	380	12	3,8	**3715381**
T38	44,3	380	14	3,8	**3716381**
T45	44,3	380	14	3,8	**3718381**

Drill rig producer	Drill type
Demag	RD 500
Furukawa	M 120 / PD 200
Gardner Denver	PR 123
Tamrock	L 600 / L 750

Shank adapter 6

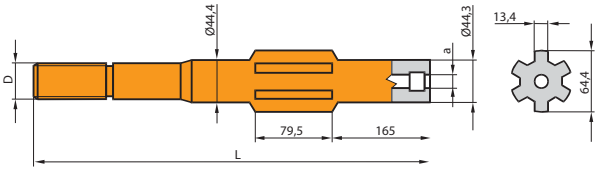

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R38	44,4	440	14	4,0	**3715446**
T38	44,4	440	14	4,0	**3716446**
T38	44,4	540	12	5,3	**3816906**

Drill rig producer	Drill type
Atlas Copco	BBE 56 U2 / BBE 57 / BBE 5701
Furukawa	HCR 300 S
Ingersoll Rand	LM 400

Atlas Copco COP 125 / COP 130 / COP 131

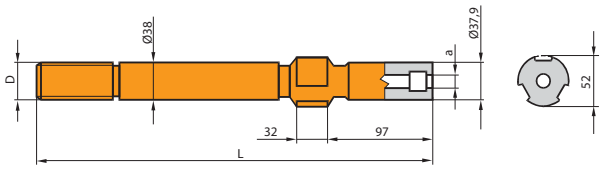

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	38	415	14	2,7	3714413
R38	38	380	14	2,9	3715383
T38	38	380	14	2,9	3716383
T45	38	380	14	3,0	3718383

Atlas Copco COP 1028



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R25	45	400	-	2,6	3412405
R28	45	400	-	2,7	3413405
R32	45	400	-	2,8	3414405

Atlas Copco COP 1028 HD

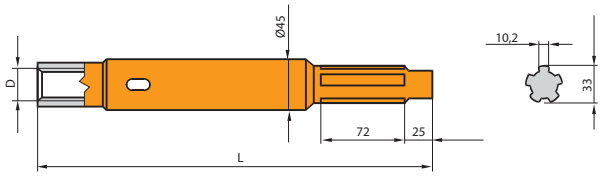

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R28	45	245	-	1,7	3423245

Atlas Copco COP 1036 / COP 1038 HB / COP 1038 HD / COP 1238 HF / COP 1238 LE / COP 1238 ME

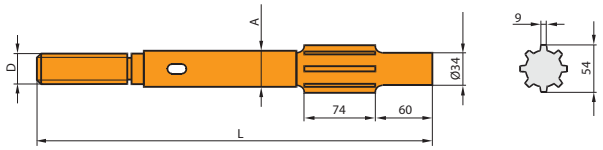

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R25	38	485	-	3,8	3412488
R32	38	485	-	4,0	3414488
R32	38	500	-	4,1	3414508
R32	38	575	-	4,7	3414578
R38	38	462	-	3,9	3415468
R38	38	485	-	4,1	3415488
R38	38	500	-	4,2	3415508
T38	38	485	-	4,1	3416488
T38	38	500	-	4,2	34165081
T38	38	590	-	4,9	3416598
T45	45	500	-	5,4	3418508
T45	45	575	-	6,0	3418578

Atlas Copco COP 1038 HL / COP 1238



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	38	575	-	4,7	**34145781**
T38	38	575	-	4,8	**34165781**
T45	45	575	-	6,0	**34185781**

Atlas Copco COP 1238



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R25	38	485	-	3,8	**3422488**
R32	38	485	-	4,0	**3424488**
R38	38	485	-	4,2	**3425488**
T38	38	485	-	4,2	**3426488**

Atlas Copco COP 1432 F



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	55	341	-	4,2	**3424348**
R38	55	341	-	4,4	**3425348**
T38	55	341	-	4,4	**3426348**

Atlas Copco COP 1432 / COP 1440 / COP 1532 / COP 1838 HD



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	38	435	-	4,0	**3414438**
R32	38	525	-	4,0	**3414528**
R38	38	435	-	4,0	**3415438**
R38	38	455	-	4,1	**34154582**
R38	38	525	-	4,7	**34155281**
T38	38	435	-	4,0	**3416438**
T38	38	525	-	5,7	**34165283**

Atlas Copco COP 1440 / COP 1550 / COP 1838



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	52	525	-	5,8	**34145284**
R38	52	525	-	6,0	**34155283**
T38	52	525	-	6,0	**34165282**
T45	52	525	-	6,7	**34185281**
T51	52	525	-	6,8	**3410528**

Atlas Copco COP 1640 / COP 1840



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T38	52	565	-	7,0	3416568
T45	52	565	-	7,2	3418568
T51	52	565	-	7,6	3410568

Atlas Copco COP 2160



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T45	60	770	-	10,9	34187712
T51	60	770	-	11	34107712

Atlas Copco COP 2160 Extractor



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T45	63	770	-	13,2	3418779
T51	63	770	-	13,3	3410779

Atlas Copco COP 2560



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T51	60	770	-	11,0	34107711
T60	60	770	-	12,4	34127711

Atlas Copco COP 2560 Extractor

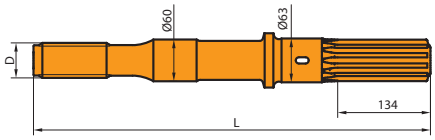

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T51	63	770	-	13,3	3410771
T60	63	770	-	14,0	3412771
GT60	63	770	-	14,0	34127712

Atlas Copco COP 3038



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T38	45	435	-	4,8	34164382
T38	45	525	-	5,2	34165284

Atlas Copco COP 4050 Extractor



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T51	70	790	-	14,7	34107981

Atlas Copco COP 4050 Extractor



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
ST58	70	790	-	21,8	3411838

Atlas Copco COP 4050 Extractor



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
ST68	70	835	-	21,7	3413839

Boart HD 65

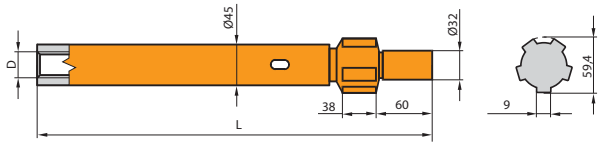

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R25	45	325	-	3,6	3422325
R28	45	325	-	3,5	3423325
R32	45	325	-	3,5	3424325

Boart HD 125 / HD 150

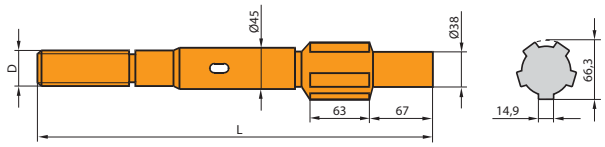

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	45	495	-	5,2	3414495
R32	45	545	-	5,9	3414545
R32	45	572	-	6,0	3414575
R38	45	495	-	5,7	3415495
T38	45	495	-	5,5	3416495
T38	45	590	-	6,3	3416595
T38	45	570	-	6,2	34165751

Boart HD 125 / HD 150



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R25	45	495	-	6,1	3422495
R25	45	572	-	7,0	3422575
R32	45	343	-	4,2	3424345

Boart HD 155



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	55	578	-	8,4	34145751
R38	55	578	-	9,5	3415585
T45	55	578	-	9,6	3418585
T51	55	578	-	9,7	3410575

Boart HD 155



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	55	578	-	9,7	3424585
R38	55	578	-	9,4	3425585

Furukawa HCR 9-DS / HD 609



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T51	45	690	-	6,4	3416698

Furukawa HD 715

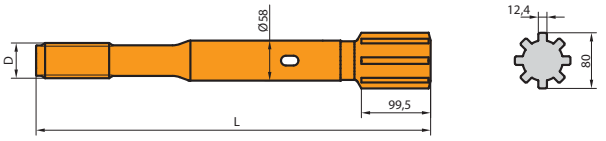

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T51	58	790	-	6,4	3410798

Gardner Denver HPR 2



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T51	50,7	914	-	14,0	3410919

Ingersoll Rand YH 65 / YH 70

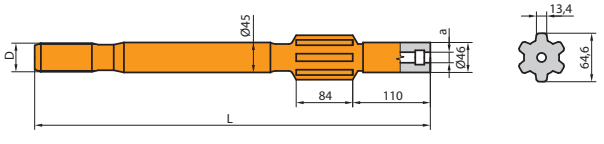

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T38	45	500	19	5,2	3816506
T45	45	500	19	5,5	3818506

Ingersoll Rand YH 65 RP

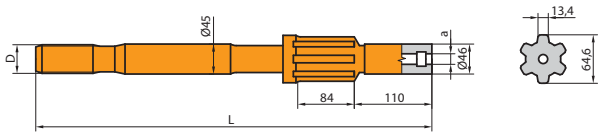

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T38	45	700	19	7,8	**3816706**
T45	45	700	19	7,9	**3818706**

Ingersoll Rand YH 80 A

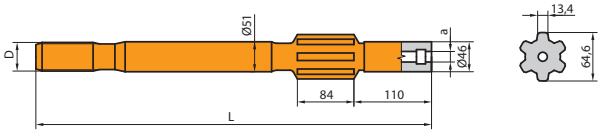

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T38	51	500	19	5,5	**3816046**
T45	51	500	19	5,7	**3818036**
T51	51	500	19	6,4	**3810026**

Ingersoll Rand YH 80 A RP



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T45	51	700	19	8,8	**38187061**
T51	51	700	19	9,3	**38107061**

Ingersoll Rand YH 95 / YH 100



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T51	51	625	23	8,2	**3810028**

Ingersoll Rand YH 95 RP / YH 100 RP



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T51	51	840	23	11,6	**3810848**

Ingersoll Rand YH 110 V / YH 135



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T45	55	728	-	11,4	**3418728**
T51	55	728	-	11,7	**3410728**

Joy VCR 360

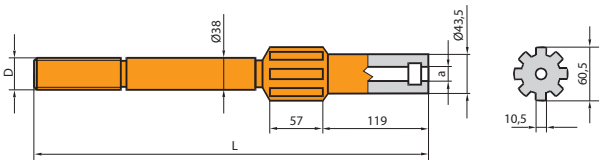

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T38	38	387	16	3,9	3816018

Krupp HB 101



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T38	65	650	-	10,9	3416656

Krupp HB 101

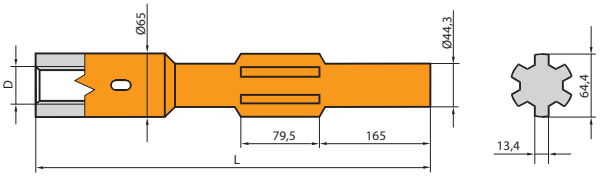

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R38	65	590	-	10,7	3425596
T38	65	590	-	10,7	3426596
T45	65	590	-	10,5	3428596

Montabert HC 40 / HC 50



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	38	370	-	3,0	3414378
R32	38	445	-	3,5	34144481
R38	38	370	-	3,3	3415378
R38	38	380	-	3,2	34153881
R38	38	445	-	4,0	34154481
T38	38	370	-	3,2	3416378
T38	38	445	-	3,8	3416448

Montabert HC 80 / HC 90 / HC 105



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	38	440	-	3,6	3414448
R38	38	440	-	3,9	3415448
T38	38	440	-	3,9	34164481

Montabert HC 80 RP / HC 120 RP



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T38	45	770	-	8,6	**3416778**
T45	45	670	-	7,5	**3418678**
T45	45	770	-	8,6	**3418778**

Montabert HC 109



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	45	530	-	5,6	**3414538**
R38	45	530	-	5,9	**3415538**
T38	45	530	-	5,9	**3416538**
T45	45	530	-	6,1	**3418538**

Montabert HC 109



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R25	45	530	-	6,3	**3422538**

Montabert HC 120 RP / HC 150 RP / HC 155 RP / HC 158 RP



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T45	51	670	-	8,8	**34186781**
T45	51	770	-	10,2	**34187781**
T51	51	670	-	8,9	**34106781**

Montabert HC 160



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T51	60	810	-	15,6	**3410818**

Montabert HC 200



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T51	51	840	-	13,2	**3410848**

Montabert HC 200 A



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T51	60	835	-	16,3	**3410838**
GT60	60	850	-	16,9	**3412858**

Reedrill HPR 4519

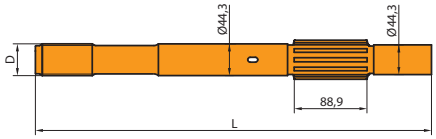

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T38	44,3	770	-	8,7	**3416771**
T45	44,3	770	-	9,0	**3418771**

Reedrill HPR 5123

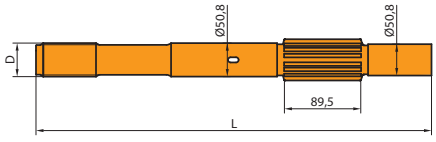

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T45	50,8	770	-	11,8	**34187791**
T51	50,8	770	-	12,1	**34107791**

Reedrill HPR 6030

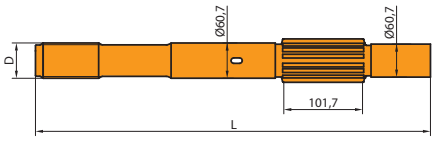

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T51	60,7	1041	-	19,5	**3410109**

Secoma Hydrastar 200

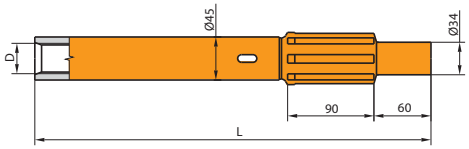

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	45	351	-	3,7	**3424358**

Tamrock HL 300



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	32	400	-	2,6	**3414408**

Tamrock HL 300 S

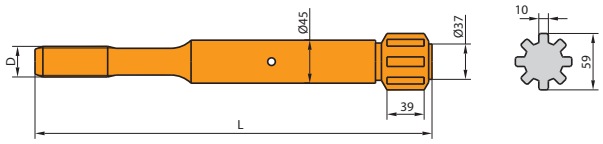

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	45	380	-	3,9	**3414388**
R38	45	380	-	4,1	**3415388**
T38	45	380	-	4,2	**34163881**

Tamrock HL 300 S

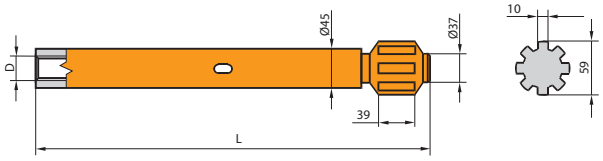

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R28	45	245	-	2,6	**34232480**
R32	45	245	-	2,6	**34242480**

Tamrock HL 438 L / HL 438 T / HLR 438 T

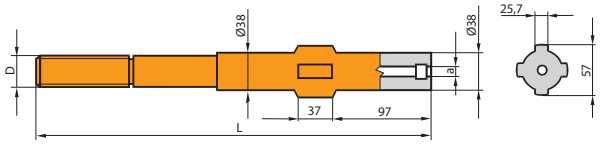

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	38	380	12	3,9	**3614384**
R38	38	380	12	3,9	**3615384**
T38	38	380	12	4,0	**3616384**

Tamrock HL 438 TS / HL 538

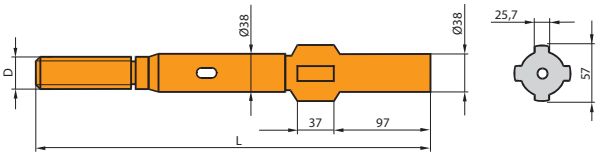

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	38	450	-	3,8	**3414454**
R38	38	450	-	4,4	**3415454**
R38	38	495	-	4,8	**3415494**
T38	38	450	-	4,4	**3416454**
T38	38	495	-	4,8	**3416494**
T38	38	545	-	5,2	**3416544**

Tamrock HL 500 / HL 500 S / HL 510 / HL 510 S

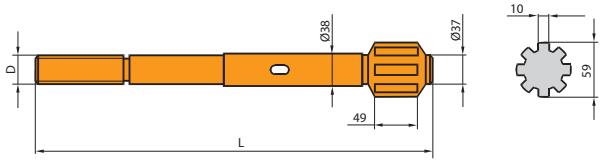

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	38	460	-	3,9	**34144680**
R32	38	550	-	4,3	**34145580**
R38	38	450	-	4,1	**34154581**
R38	38	460	-	4,2	**34154681**
R38	38	500	-	4,5	**34155083**
R38	38	550	-	4,6	**3415558**
T38	38	460	-	4,2	**3416468**
T38	38	500	-	4,5	**34165082**
T38	38	550	-	4,6	**34165582**

Tamrock HL 500 S



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R25	38	550	-	9,0	3422558

Tamrock HL 500 / HL 510

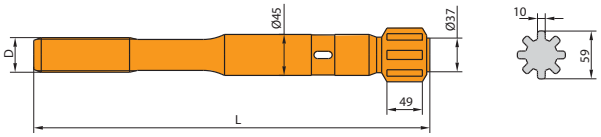

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	45	550	-	5,7	34145581
R38	45	500	-	5,4	34155084
T38	45	550	-	5,9	34165581
T45	45	550	-	6,2	3418558

Tamrock HL 600 / HL 600 S

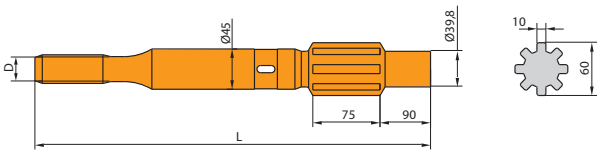

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	45	600	-	5,8	3414608
R38	45	525	-	5,6	3415528
T38	45	525	-	5,6	34165281
T38	45	600	-	6,0	3416608
T45	45	525	-	5,8	3418528
T45	45	600	-	6,4	3418608

Tamrock HL 645



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	45	525	-	5,8	34145283
T38	45	600	-	6,3	34166083
T45	45	600	-	6,5	34186083

Tamrock HL 700 / HL 800

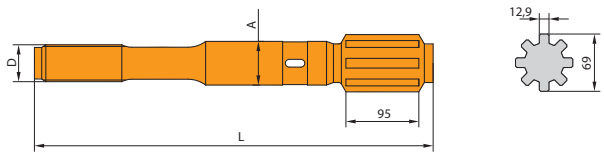

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T38	45	600	-	7,0	34166081
T45	45	600	-	7,2	34186081
T38	52	600	-	8,4	34166082
T45	52	600	-	8,8	34186082
T45	52	700	-	10,0	3418708
T51	52	600	-	9,2	3410608

Tamrock HL 1000

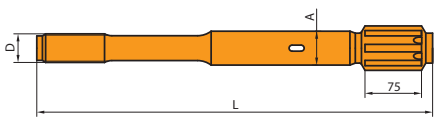

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T45	52	670	-	10,0	**34186782**
T51	52	590	-	9,3	**34105980**
T51	52	670	-	10,0	**34106780**
T60	60	670	-	12,7	**34126781**

Tamrock HL 1000



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
ST58	80	635	-	18,4	**3411638**
ST68	80	640	-	18,8	**3413648**

Tamrock HL 1000



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
GT60	80	670	-	19,5	**34126782**

Tamrock HL 1500



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T51	52	710	-	11,8	**3410718**

Tamrock HL 1500



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
ST58	80	635	-	18,1	**34116381**
ST68	80	635	-	18,3	**34136381**

Tamrock HL 1500 / HL 1560



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T51	65	760	-	16,4	**3410768**
GT60	65	760	-	16,7	**3412768**

Tamrock HLX 5



Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
R32	45	500	-	5,1	**3414509**
R38	45	500	-	5,4	**3415509**
T38	45	500	-	5,4	**3416509**
T45	45	575	-	6,4	**3418579**

Toyo 650

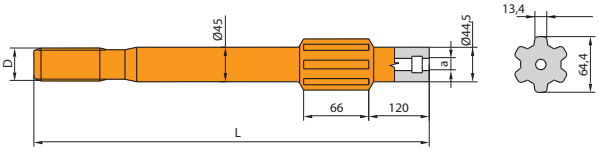

Thread	Diameter (mm)	Length (mm)	Flushing hole (mm)	Weight (kg)	Catalogue no.
T38	45	550	12	5,7	**36165560**

DRILLING TOOLS

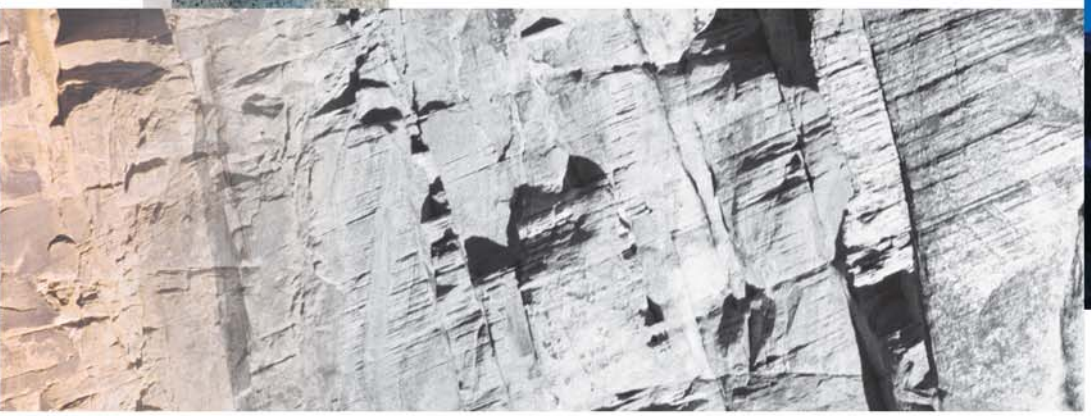

qonar

GONAR Co. Ltd., 109 Obroki Str., 40-833 Katowice, Poland
Phone: +48 32 207 12 00, Fax: +48 32 207 12 50
Sales department – Phone: +48 32 207 12 16÷18, Fax: +48 32 254 03 11
E-mail: marketing@gonar.com.pl
www.gonar.com.pl

AUSTRALIAN BRANCH

GONAR AUSTRALIA PTY LTD
UNIT 2, 8 ARUNGA DRIVE
BERESFIELD, NSW 2322
Phone: +61 2 4966 0090
E-mail: info@gonaraustralia.com.au
www.gonaraustralia.com.au